



U2 + H1  
PicoMite VGA - USB

MICRO USB

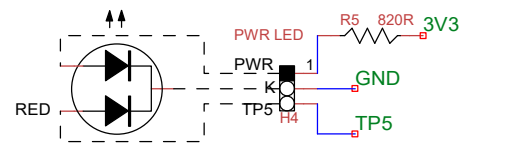

The LED connected to TP5 MUST be RED to work correctly. The PWR LED can be any colour. You can use individual LEDs or either on its own if you wish.

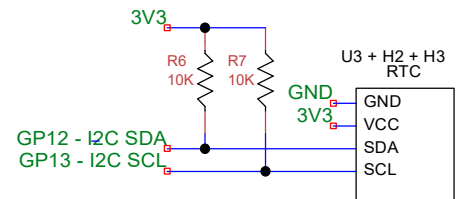

Ensure that GND link is connected appropriately prior to commissioning the system.

The entire Line Output section is optional.

All jumpers are shown in their default positions

Title PicoGAME 4		
Author Mixtel90		
MMBasic by Geoff Graham + Peter Mather		
File Z:\Computing\0_PicoM... PicoGAME 40-22 U.dsn	Document	
Revision 1.01	Date 16/3/2024	Sheets 1 of 1